
EPX-F5000



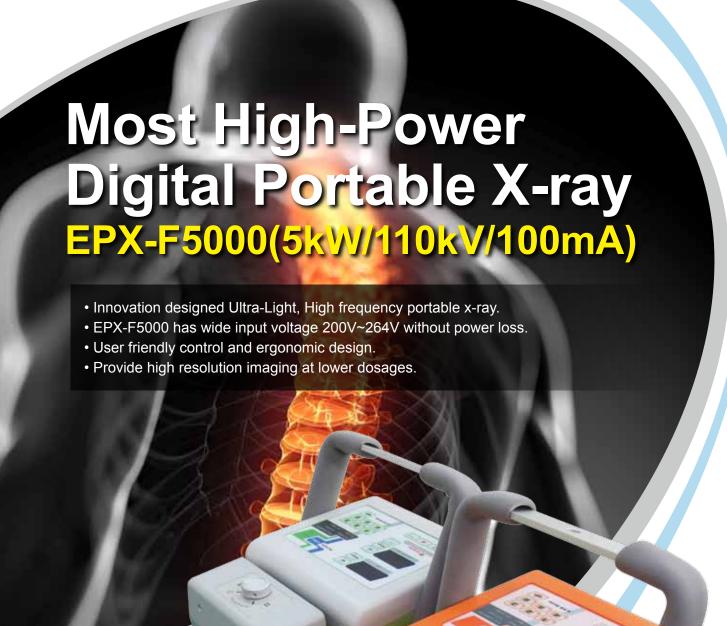

EPX-F5000

- Most compact size and lightest weight.
- Provide high resolution imaging at lower dosages.
- · Durable design with solid body.
- Soft Touch Controls with Digital displays.
- · Calibrated cassette size indicator dials
- Available with Inverted control panel for table use.
- Two stage dynamic, Auto line compensation.
- · Easy access to DR systems.
- · Dual Integrated Laser Pointer.
- Wireless/Wire PC interface(Option)

Specifications

OUTPUT POWER		5 KW
INPUT POWER	Voltage	200V-264V
	Phase & Frequency	Single / 50/60 Hz
kV Range		50~110kV/1kV step
mA Range		20~100mA
mAs Range		0.4~100mAs
Display		KV /mAs/Sec: 7-segment LED type
X-ray tube	Focal Spot	1.8mmx1.8mm
	Target Angle	15 degree
	Anode Heat Storage	30000J
Collimator	Туре	Double slit type,
		Manually operation
	Min X-ray Field Size	≦5cm x 5cm @1m SID
	Max X-ray Field Size	40cm x 40cm @ 75cm SID
	Laser Pointer	Class : II A 5mW
	Timer	Push button illuminator
		with 30 sec timer
	Lamp	24V 50W Halogen
Net weight		13kg
G weight		22kg

Mobile Stand For Portable X-ray Unit.

EMS-1000 EMS-H

